DESIGN TEAM :: CONTACT DATA

ARCHITECTURE:
GRAF STUDIO, LLC
P.O. BOX 743
FRANKLIN, KY
(270) 991-7345

SHEET INDEX

ARCHITECTURAL

A000	=	COVER SHEET
A001	=	PROJECT DETAILS
A100	=	FOUNDATION PLAN
A101	=	MAIN LEVEL PLAN
A102	=	UPPER LEVEL PLAN
A103	=	ROOF PLAN
A201	=	ELEVATIONS
A202	=	ELEVATIONS
A301	=	ELEVATION ENLARGEMENT
A302	=	BUILDING SECTION

SYMBOLS

/ A### — EXTERIOR ELEVATION, REFER TO A200 SERIES

/ A### — BUILDING SECTION, REFER TO A300 SERIES

/ A### — INTERIOR ELEVATION, REFER TO REFERNCE

BUILDING CODE INFORMATION

GENERAL INFORMATION

BUILDING CODES: 2018 KENTUCKY BUILDING CODE

OCCUPANCY CLASSIFICATION: SINGLE FAMILY (R-2)

CONSTRUCTION TYPE: TYPE VB (UNPROTECTED)

AREA BREAKDOWN:

CONDITIONED:	
MAIN LEVEL:	2,849 SQ.FT.
UPPER LEVEL:	2,156 SQ.FT.
TOTAL:	5,005 SQ.FT.
UNCONDITIONED:	
2-CAR GARAGE:	597 SQ.FT.
1-CAR GARAGE:	311 SQ.FT.
FRONT COVERED PORCH:	38 SQ.FT.
REAR COVERED PORCH:	318 SQ.FT.
OUTDOOR KITCHEN:	29 SQ.FT.
TOTAL:	1,293 SQ.FT.

ABBREVIATIONS

A.C.T.	ACOUSTIC CEILING TILE
A.D.A.	AMERICAN'S W/ DISABILITIES ACT
A.F.F.	ABOVE FINISHED FLOOR
ALUM.	ALUMINUM
B.O.	BOTTOM OF
BLDG.	BUILDING
CLG.	CEILING
COL.	COLUMN
CONC.	CONCRETE
CONT.	CONTINUOUS
COORD.	COORDINATION
C.J.	CONTROL JOINT
DET.	DETAIL
DIA.	DIAMETER
E.J.	EXPANSION JOINT
E.F.	EXHAUST FAN
E.L.	ELEVATION
E.Q.	EQUAL
EXT.	EXTERIOR
F.D.	FLOOR DRAIN (COORD. W/ PLUMBING)
F.E.	FIRE EXTINGUISHER
F.E.C.	FIRE EXTINGUISHER CABINET
F.F.E.	FINISHED FLOOR ELEVATION
FLR.	FLOOR
F.R.T.	FIRE RETARDANT TREATED
F.V.	FIELD VERIFY
GALV.	GALVANIZED
GYP.	GYPSUM BOARD
H.M.	HOLLOW METAL
MFR.	MANUFACTURER
MTL.	METAL
M.O.	MASONRY OPENING
O.C.	ON CENTER
O.H.	OPPOSITE HAND
PTD.	PAINTED
R.S.	ROOF DRAIN
SIM.	SIMILAR
TYP.	TYPICAL
U.N.O.	UNLESS NOTED OTHERWISE
V.I.F.	VERIFY IN FIELD

VICINITY MAP

NOTE: THIS DRAWING SET IS INTENDED FOR THE CONSTRUCTION OF 1 PROJECT ON 1 OCCASION AND IS INTENDED ONLY FOR THE CLIENT(S) WHO CONTRACTED GRAF STUDIO, LLC. THIS DESIGN AGREEMENT CANNOT BE TRANSFERRED.

VIOLATION OF THIS POLICY IS A VIOLATION OF FEDERAL COPYRIGHT STATUTES WHICH MAY INCLUDE DAMAGES OF UP TO $150,000 PER INFRACTION.

UNAUTHORIZED REPRODUCTION, COPYING, OR REUSE OF THIS DESIGN OR ITS PARTS IS SUBJECT TO PROSECUTION.

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:

ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

COVER SHEET
SHEET 01 A-000

GENERAL NOTES

1. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND SITE CONDITIONS BEFORE COMMENCING WORK. THE ARCHITECT MUST BE NOTIFIED OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK.

2. DO NOT SCALE DRAWINGS. IF DIMENSIONS ARE IN QUESTION, OBTAIN CLARIFICATION FROM THE ARCHITECT BEFORE CONTINUING WITH THE WORK.

3. DIMENSIONS ARE WITNESSED TO FACE OF CONCRETE OR TO FACE OF STUD UNLESS OTHERWISE NOTED = U.N.O..

4. ALL WORK PERFORMED UNDER THIS CONTRACT SHALL MEET ALL STATE BUILDING CODES, THE NATIONAL ELECTRIC CODE, AND ORDINANCES OF THE LOCAL AUTHORITY HAVING JURISDICTION.

5. THE ARCHITECT SHALL BE NOTIFIED BEFORE PROCEEDING WITH THE WORK IF A CONFLICT IS DISCOVERED WITHIN THE CONSTRUCTION DOCUMENTS.

6. THERE SHALL BE NO BUILDING MATERIALS CONTAINING ASBESTOS OR OTHER HAZARDOUS MATERIALS INSTALLED ON THIS PROJECT.

7. ALL MATERIALS AND EQUIPMENT PROVIDED SHALL BE INSTALLED AS PER MANUFACTURER'S RECOMMENDATION AND AS PER CODE REQUIREMENTS.

8. ITEMS REQUIRING FINISH SELECTIONS THAT DO NOT APPEAR IN THE DOCUMENTS SHALL BE SELECTED BY OWNER'S REPRESENTATIVE FROM SHOP DRAWINGS, SUBMITTAL, AND/OR SAMPLES AS REQUIRED.

9. THE DESIGN, ADEQUACY, AND SAFETY OF ERECTION BRACING, SHORING TEMPORARY SUPPORTS, ETC. IS THE SOLE RESPONSIBILITY OF THE GENERAL CONTRACTOR.

10. FILL SOLID ALL NEW MASONRY VOIDS WHERE ANCHORS OCCUR. FILL SOLID ALL NEW MASONRY UNITS LOCATED BELOW FINISHED GRADE.

11. COORDINATE LOCATIONS AND/OR ELEVATIONS OF FLOOR DRAINS, REGISTERS, GRILLES, LOUVERS, PANELS, ETC., WITH MECHANICAL AND ELECTRICAL CONTRACTORS.

12. SIZE AND LOCATION OF ALL FLOOR OPENINGS TO BE VERIFIED WITH THE TRADE AFFECTED BEFORE PROCEEDING WITH THE WORK.

13. BOLTING OF WOOD TO STRUCTURAL MEMBERS OF MASONRY SHALL BE WITH A MINIMUM OF 3/4" BOLTS AT 3'-0" O.C. EXCEPT WHERE SHOWN OTHERWISE.

14. PROVIDE LINTELS OVER ALL OPENINGS INCLUDING THOSE REQUIRED FOR DUCTWORK, PIPES, LOUVERS, GRILLES, DAMPERS, ETC.

15. PROVIDE CONCRETE PADS FOR ALL NEW MECHANICAL AND ELECTRICAL EQUIPMENT.

16. PROVIDE DOUBLE STUDS AND BLOCKING WHERE REQUIRED TO SUPPORT EQUIPMENT AND/OR MISCELLANEOUS ITEMS, I.E., TYPICAL CASEWORK MILLWORK, CABINETS, ETC.

17. SLOPE ALL GRADES, WALKS, AND CONCRETE PADS AWAY FROM BUILDING AT LEAST 1/8" PER FOOT.

18. PROVIDE CONCRETE SPLASH BLOCKS AT ALL DOWNSPOUT LOCATIONS.

19. PROVIDE 6 MIL VAPOR BARRIER UNDER ALL NEW INTERIOR CONCRETE SLAB ON GRADE CONDITIONS.
20. PROVIDE 1" THICK PERIMETER INSULATION AT ALL NEW SLABS ALONG EXTERIOR WALLS.

21. THE "GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION" A.I.A. DOCUMENT A-201 IS HEREBY MADE A PART OF THIS PROJECT THE SAME AS IF BOUND HEREIN. THESE CONDITIONS APPLY TO ALL SUB-CONTRACTORS AS WELL AS TO THE GENERAL CONTRACTOR.

22. CONTRACTOR SHALL MAINTAIN THE JOB CLEAR OF TRASH AND DEBRIS. ALL WASTE MATERIAL SHALL BE REMOVED FROM SITE PRIOR TO SUBSTANTIAL COMPLETION AND PRIOR TO FINAL ACCEPTANCE.

23. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS SHOWN ON THESE DRAWINGS WITH THOSE AT THE SITE. ANY VARIATION WHICH REQUIRES PHYSICAL CHANGE SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.

24. CONTRACTOR SHALL NOT CUT STRUCTURAL WORK IN A MANNER RESULTING IN A REDUCTION OF LOAD CARRYING CAPACITY OR LOAD/DEFLECTION RATIO. NOTIFY ARCHITECT OF ALL STRUCTURAL CUTS PRIOR TO EXECUTION TO OBTAIN WRITTEN APPROVAL.

25. THE BUILDING ENVELOPE SHALL BE MAINTAINED IN A WATERTIGHT CONDITION AT ALL TIMES.

NOTE: THIS DRAWING SET IS INTENDED FOR THE CONSTRUCTION OF 1 PROJECT ON 1 OCCASION AND IS INTENDED ONLY FOR THE CLIENT(S) WHO CONTRACTED GRAF STUDIO, LLC. THIS DESIGN AGREEMENT CANNOT BE TRANSFERRED.

VIOLATION OF THIS POLICY IS A VIOLATION OF FEDERAL COPYRIGHT STATUTES WHICH MAY INCLUDE DAMAGES OF UP TO $150,000 PER INFRACTION.

UNAUTHORIZED REPRODUCTION, COPYING, OR REUSE OF THIS DESIGN OR ITS PARTS IS SUBJECT TO PROSECUTION.

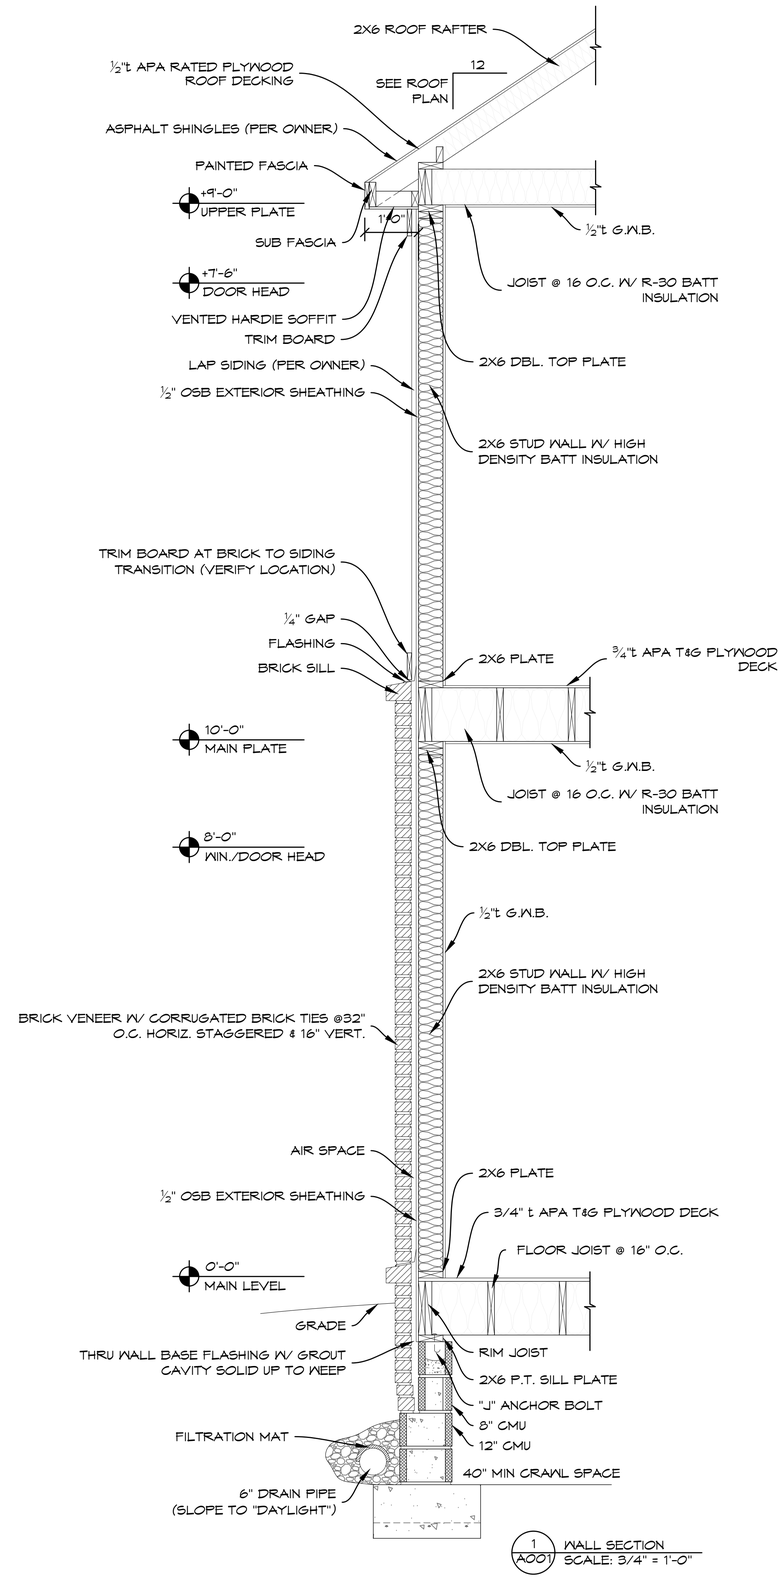

1 A001 WALL SECTION
SCALE: 3/4" = 1'-0"

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:

ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

PROJECT DETAILS
SHEET 02 A-001

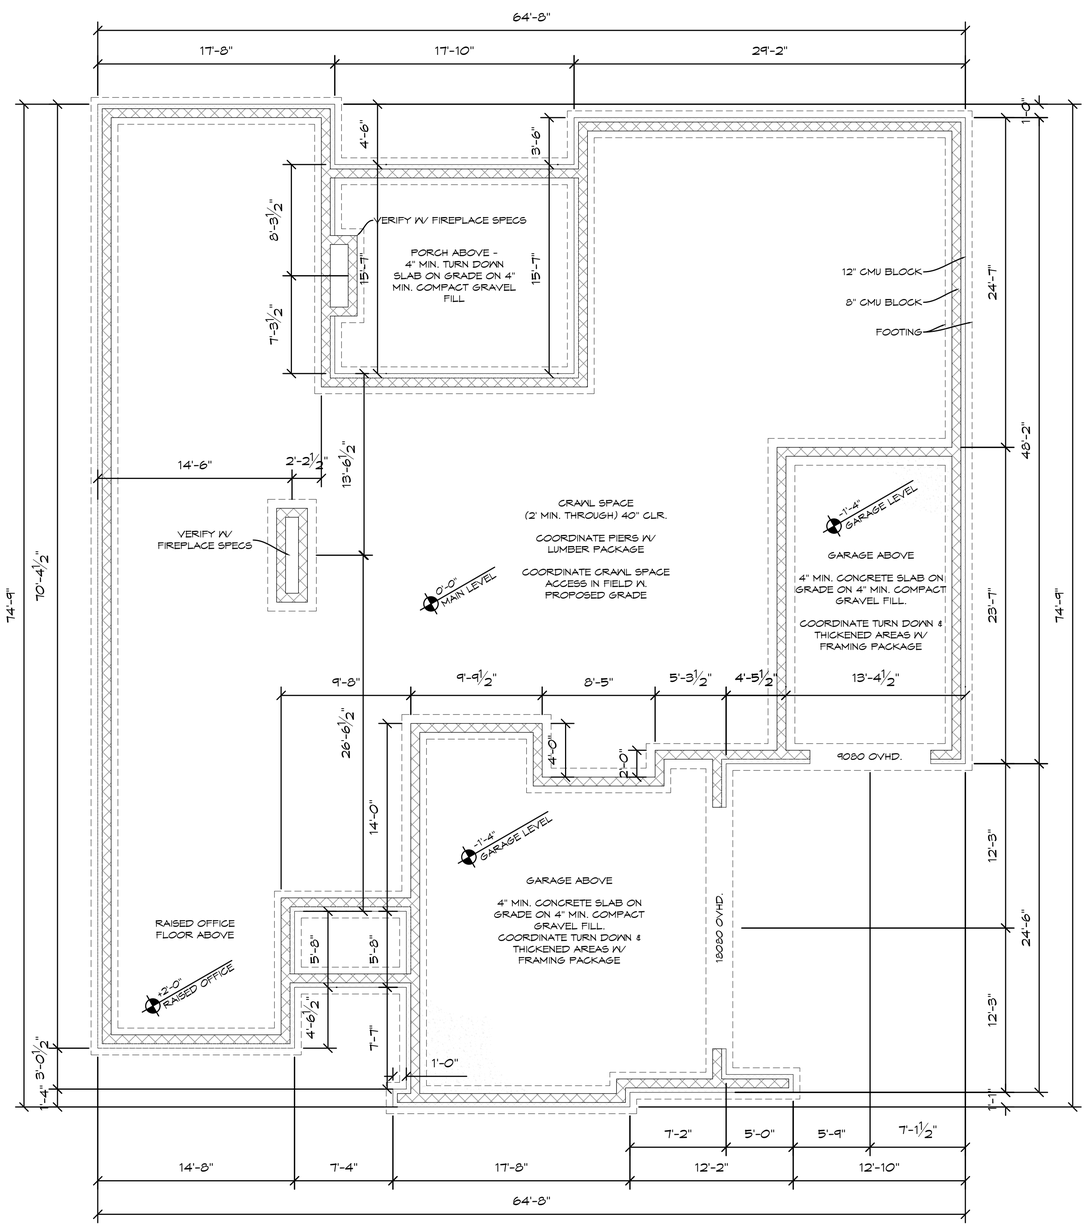

3
A201

2
A201

4
A201

1
A201

GENERAL NOTES

- ALL DIMENSIONS ARE WITNESSED FROM FACE OF CONCRETE BLOCK TO F.O. CONCRETE BLOCK UNLESS NOTED OTHERWISE.

- ALL WALLS ARE 8" CONCRETE BLOCK (CMU) ON 12" CMU BRICK LEDGE UNLESS NOTED OTHERWISE

- COORDINATE VENEER LEDGE IN FIELD W/ CLIENT MASONRY SELECTION.

- REFER TO STRUCTURAL FOR FOUNDATION DETAILS AND SPECIFICATIONS.

WALL LEGEND
NEW CONSTRUCTION

- 8" CONCRETE BLOCK
- 12" CONCRETE BLOCK BELOW
- CONCRETE SLAB ON GRADE - REFER TO STRUCTURAL

1 A100 FOUNDATION PLAN
SCALE: 3/16" = 1'-0"

0' 10' 30'

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

FOUNDATION PLAN
SHEET 03
A-100

GENERAL PLAN NOTES

1. ALL DIMENSIONS ARE WITNESSED FROM FACE OF STUD TO FACE OF STUD UNLESS NOTED OTHERWISE.

2. ALL WALLS ARE WOOD STUD FRAMING UNLESS NOTED OTHERWISE.

3. ALL PLUMBING WALLS TO BE 2X6 STUDS UNLESS NOTED OTHERWISE.

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:

ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

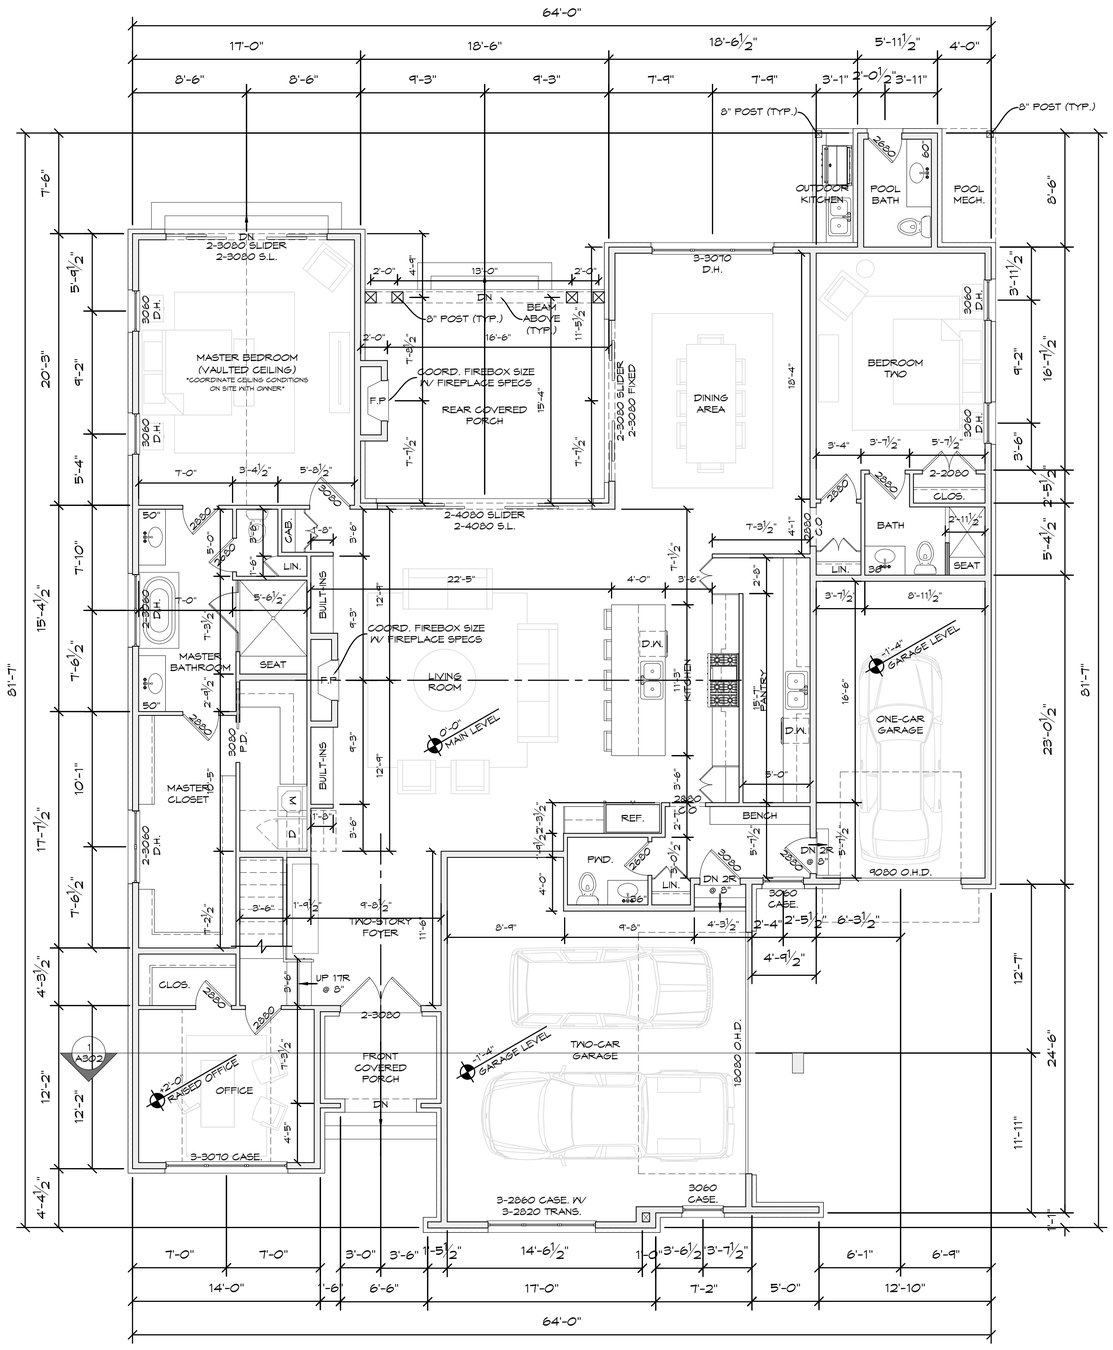

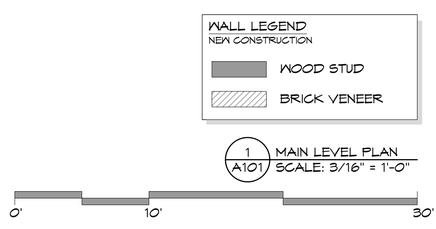

1 A101 MAIN LEVEL PLAN
SCALE: 3/16" = 1'-0"

2903 SNOWDEN ROAD NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

MAIN LEVEL PLAN
SHEET 04
A-101

GENERAL PLAN NOTES

1. ALL DIMENSIONS ARE WITNESSED FROM FACE OF STUD TO FACE OF STUD UNLESS NOTED OTHERWISE.

2. ALL WALLS ARE WOOD STUD FRAMING UNLESS NOTED OTHERWISE.

3. ALL PLUMBING WALLS TO BE 2X6 STUDS UNLESS NOTED OTHERWISE.

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:

ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

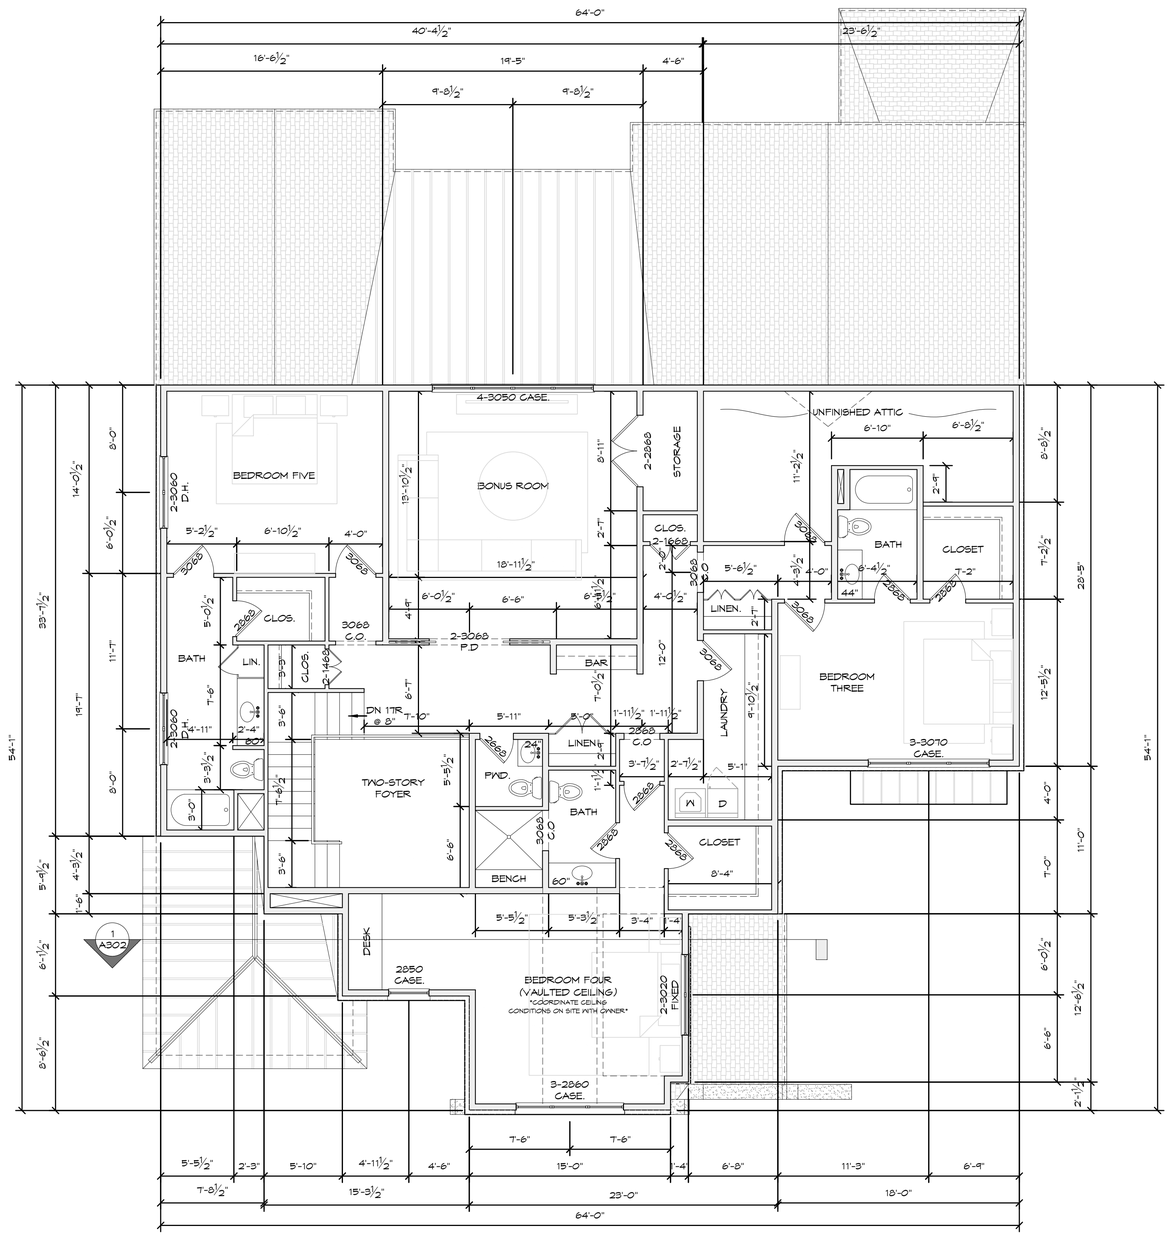

WALL LEGEND
NEW CONSTRUCTION

WOOD STUD

BRICK VENEER

1 A102 UPPER LEVEL PLAN
SCALE: 3/16" = 1'-0"

0' 10' 30'

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:	
CHECKED BY:	
CLIENT:	P: E:
DATE:	12-17-2025
PROJECT STATUS:	DESIGN/BID/REVIEW

UPPER LEVEL PLAN

SHEET 05 A-102

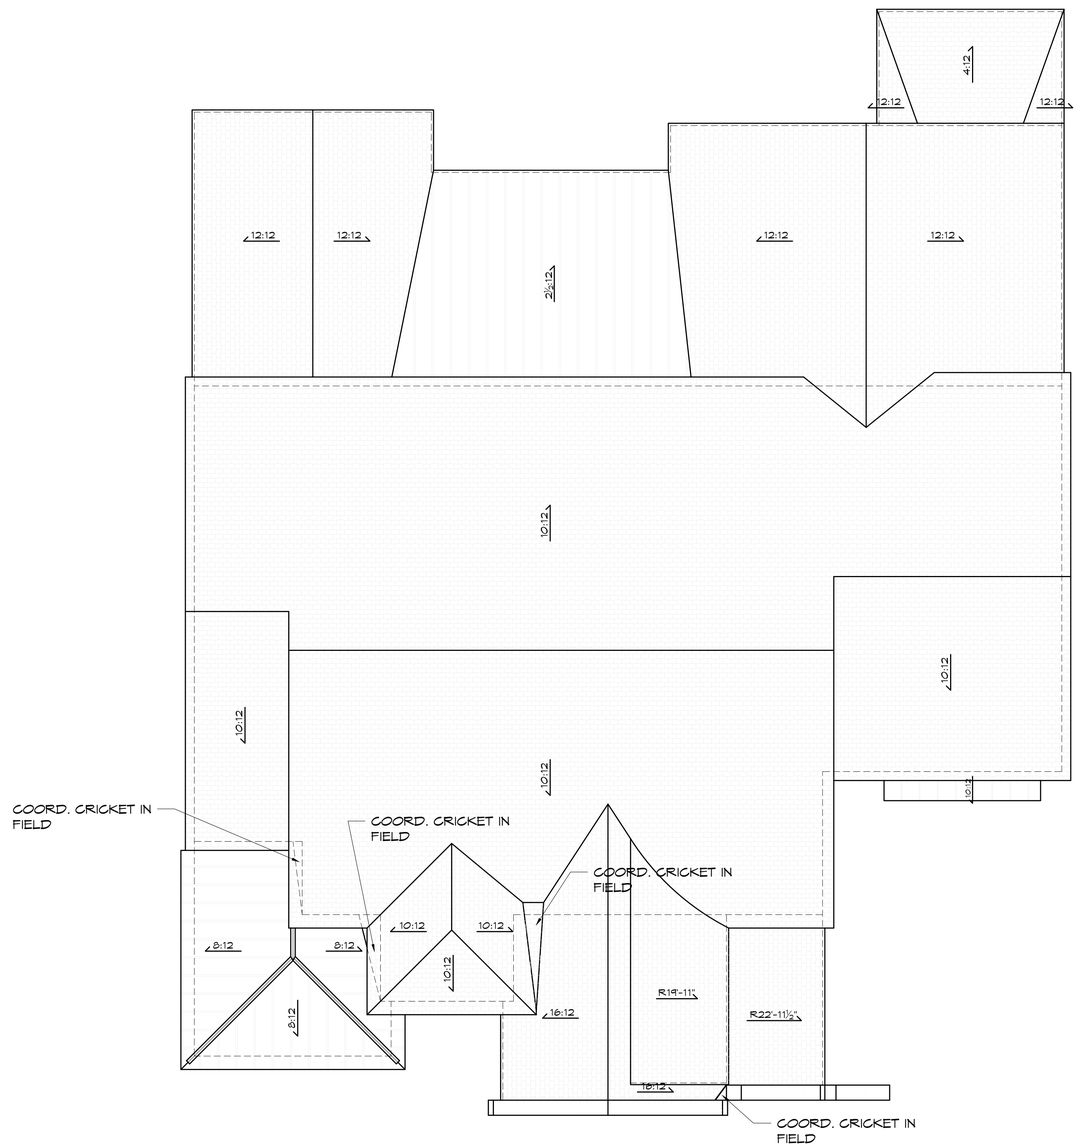

ROOF LEGEND
NEW CONSTRUCTION

ASPHALT SHINGLES

FLAT ROOF

1 A103 ROOF PLAN
SCALE: 3/16" = 1'-0"

0' 10' 30'

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

ROOF PLAN
SHEET 06
A-103

MATERIAL LEGEND
NEW CONSTRUCTION

- ASPHALT SHINGLES (PER OWNER)
- METAL STANDING SEAM (PER OWNER)
- STONE VENEER (PER OWNER)
- BRICK VENEER (PER OWNER)
- HARDIE SIDING (PER OWNER)

1 A202

1 A201 FRONT ELEVATION
SCALE: 3/16" = 1'-0"

2 A202

2 A201 REAR ELEVATION
SCALE: 3/16" = 1'-0"

0' 10' 30'

NOTE: COORDINATE VENEER LEDGE IN FIELD W/ CLIENT MASONRY SELECTION

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

FRONT/REAR ELEVATIONS
SHEET 07
A-201

MATERIAL LEGEND
NEW CONSTRUCTION

- ASPHALT SHINGLES (PER OWNER)
- METAL STANDING SEAM (PER OWNER)
- STONE VENEER (PER OWNER)
- BRICK VENEER (PER OWNER)
- HARDIE SIDING (PER OWNER)

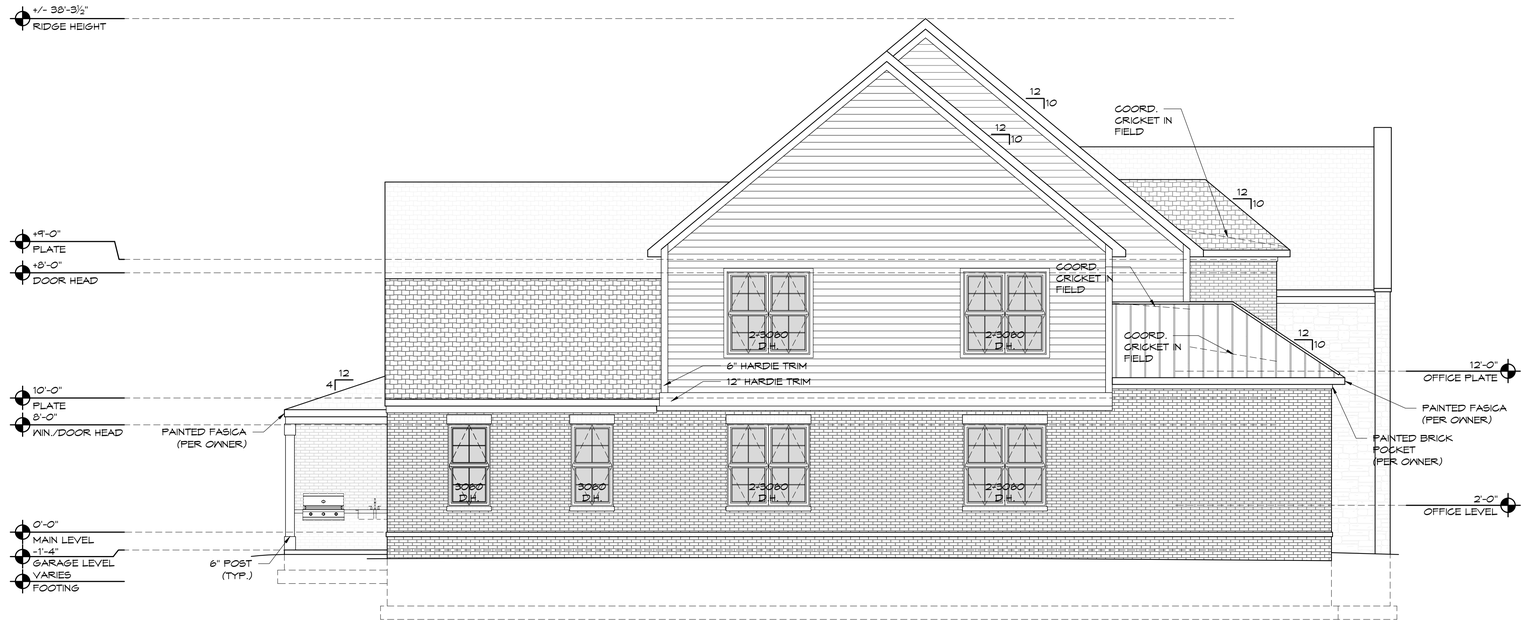

1 A202 LEFT ELEVATION
SCALE: 3/16" = 1'-0"

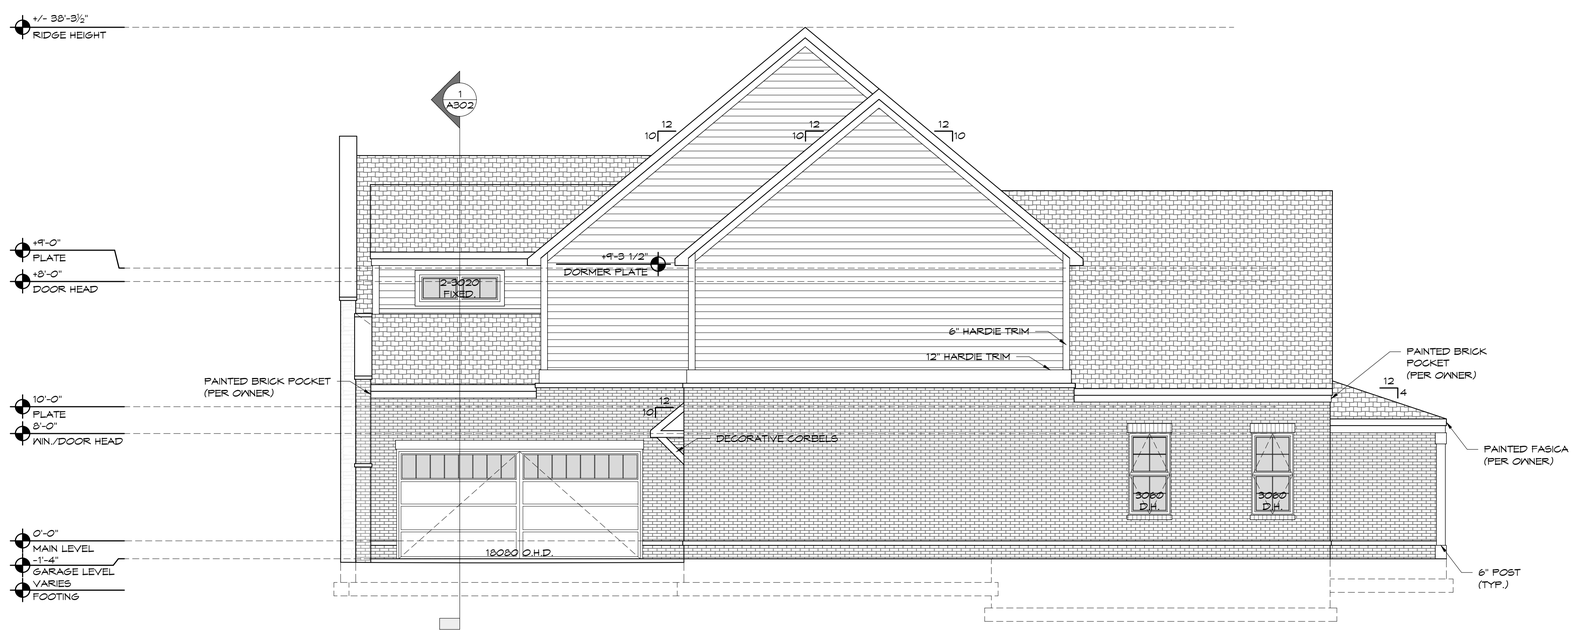

2 A202 RIGHT ELEVATION
SCALE: 3/16" = 1'-0"

0' 10' 30'

NOTE: COORDINATE VENEER LEDGE IN FIELD W/ CLIENT MASONRY SELECTION

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

LEFT/RIGHT ELEVATIONS
SHEET 08
A-202

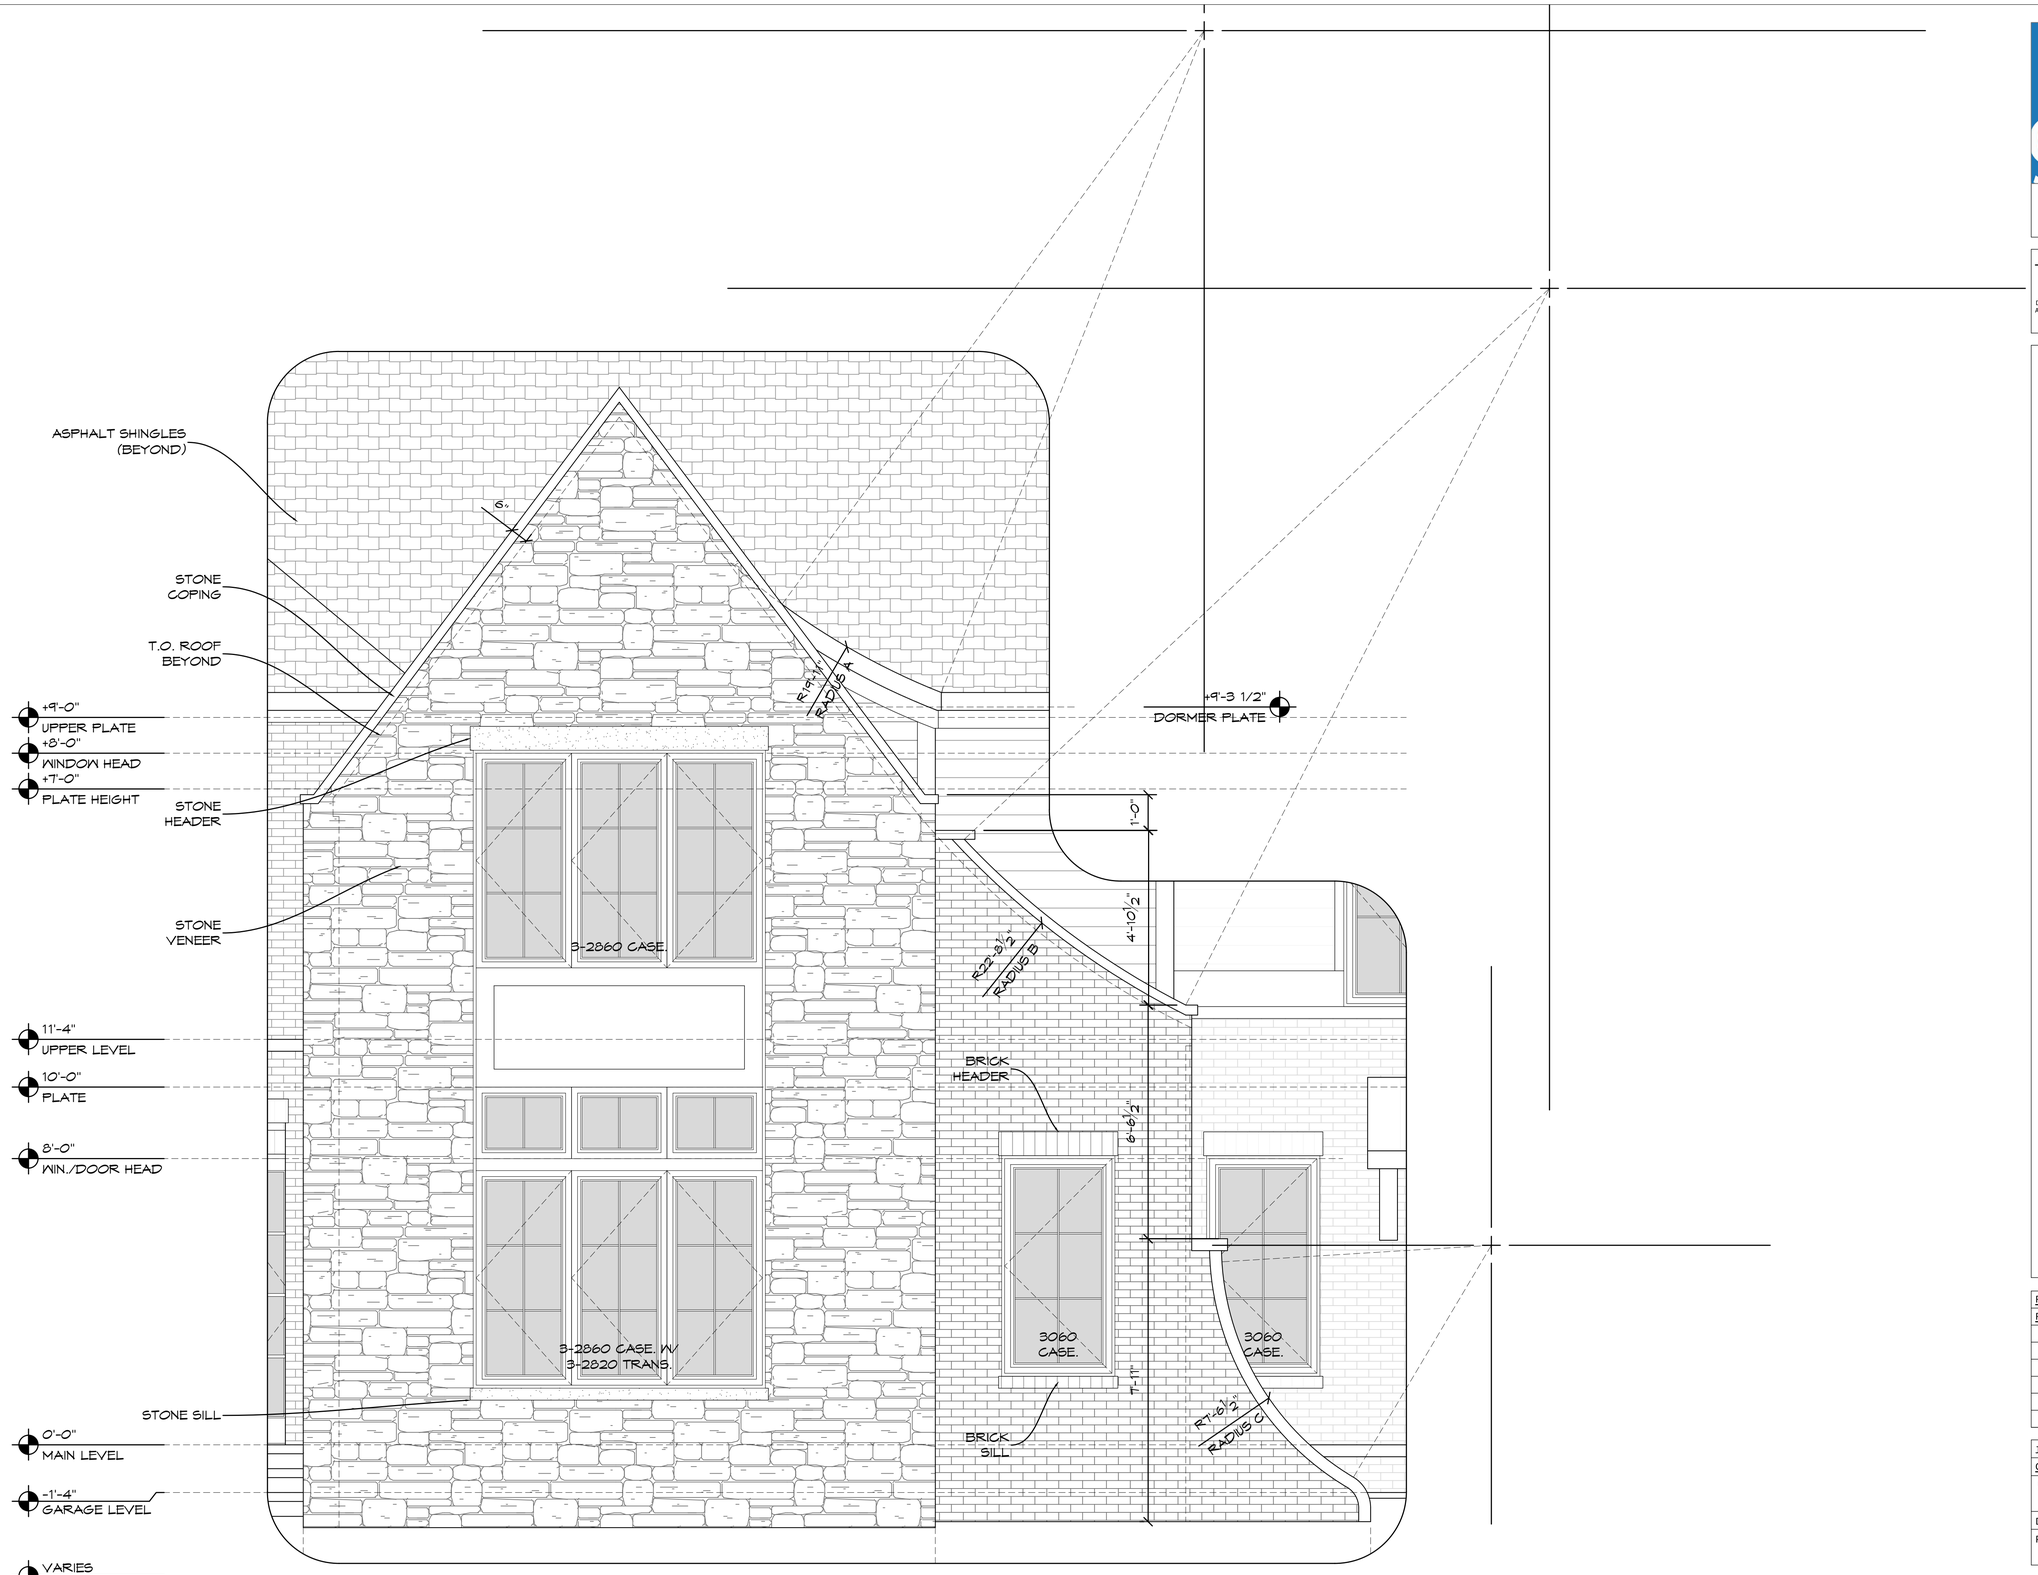

1 A301 FRONT ELEVATION ENLARGEMENT
SCALE: 1/2" = 1'-0"

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.
ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

FRONT ELEVATION ENLARGEMENT
SHEET 09
A-301

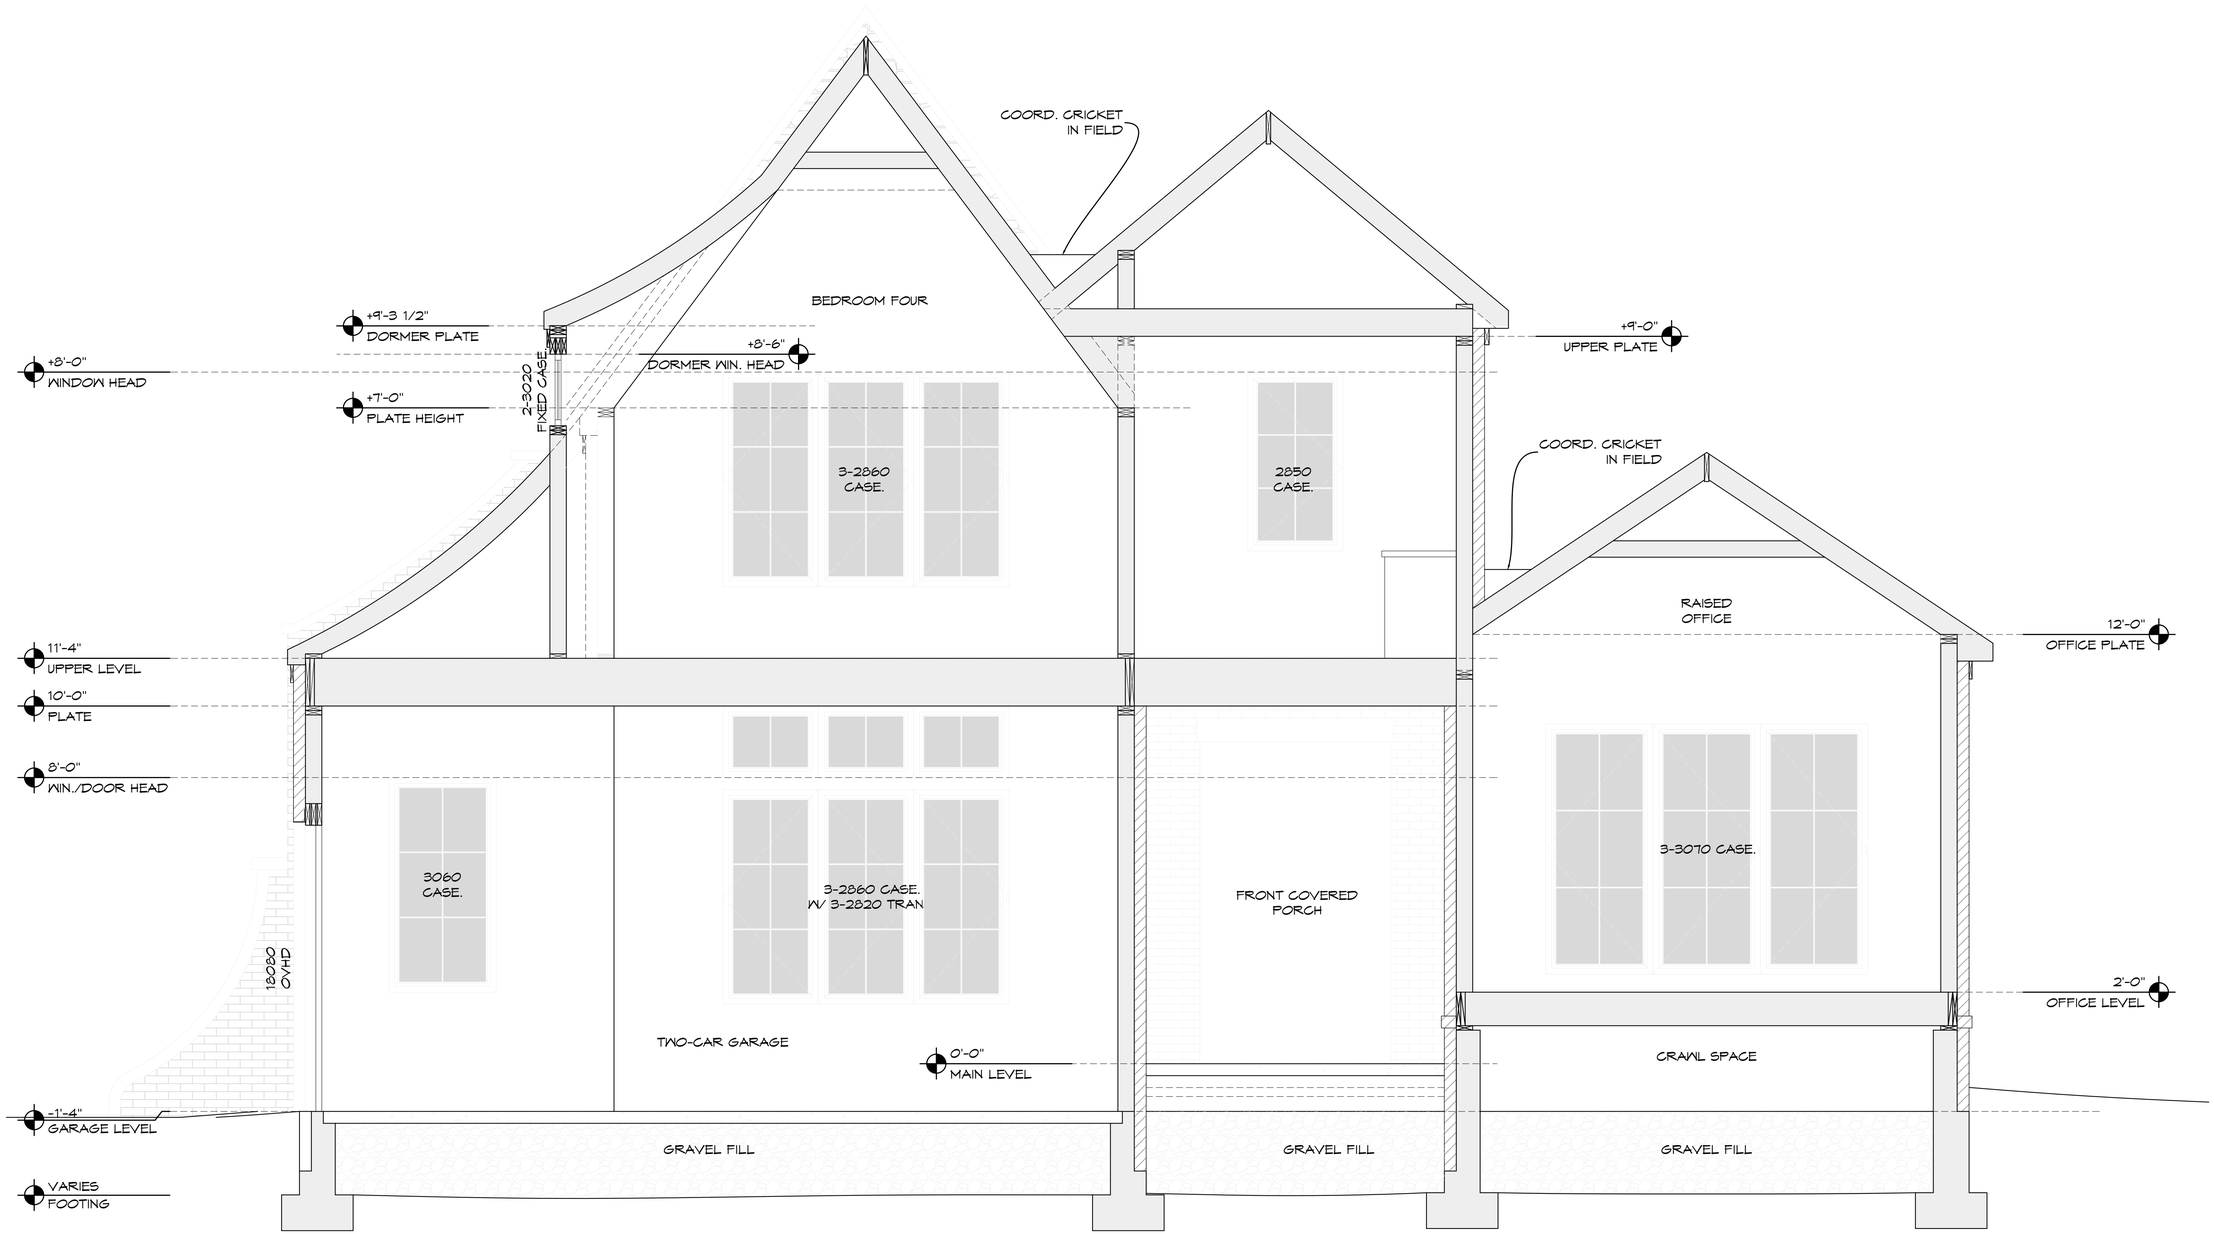

1 A302 BUILDING SECTION
SCALE: 1/2" = 1'-0"

graf studio
P.O. BOX 743
FRANKLIN, KY 42135
(270) 991 - 7345
leeross@thegrafstudio.com

DISCLAIMER:
ALL WORK SHALL CONFORM TO LOCAL, STATE AND FEDERAL BUILDING CODES.

ALL INFORMATION CONTAINED WITHIN THESE DOCUMENTS IS THE PROPERTY OF GRAF STUDIO, LLC AND SHALL NOT BE COPIED WITHOUT PRIOR EXPRESS WRITTEN CONSENT.

2903 SNOWDEN ROAD
NASHVILLE, TN 37204

REVISIONS:
REVISIONS: 12-19-2023

JOB NUMBER:
CHECKED BY:
CLIENT:
P:
E:
DATE: 12-17-2025
PROJECT STATUS:
DESIGN/BID/REVIEW

BUILDING SECTION
SHEET 10
A-302